


LABYRINTH SEALS

U.S.Seal Mfg. Part No.		Sizes Size in MM		
Type L	Type M	ID	OD	Width
PS-5601	PS-5016	20	28	10
PS-5602	PS-5017	22	30	10
PS-5603	PS-5630	25	37	10
PS-5604	PS-5680	28	39	10
PS-5605	PS-5631	30	42	10
PS-5062	PS-5632	32	45	10
PS-5606	PS-5633	35	47	10
PS-5607	PS-5634	40	52	10
PS-5038	PS-5635	42	55	10
PS-5051	PS-5636	45	55	10
PS-5608	PS-5681	48	62	10
PS-5048	PS-5637	50	62	10
PS-5609	PS-5682	52	68	10
PS-5610	PS-5638	55	68	10
PS-5611	PS-5683	58	72	10
PS-5612	PS-5684	60	72	10
PS-5627	PS-5645	60	80	10
PS-5613	PS-5686	63	80	10

U.S.Seal Mfg. Part No.		Sizes Size in MM		
Type L	Type M	ID	OD	Width
PS-5628	PS-5687	65	80	10
PS-5614	PS-5639	65	85	10
PS-5615	PS-5688	68	85	10
PS-5616	PS-5689	70	85	10
PS-5629	PS-5646	70	90	10
PS-5617	PS-5690	72	90	10
PS-5618	PS-5036	75	90	10
PS-5619	PS-5691	80	100	10
PS-5049	PS-5648	90	110	10
PS-5050	PS-5640	100	120	10
PS-5620	PS-5641	110	130	15
PS-5621	PS-5692	120	140	15
PS-5622	PS-5642	130	150	15
PS-5623	PS-5693	140	170	15
PS-5624	PS-5643	150	180	15
PS-5014	PS-5694	160	190	20
PS-5626	PS-5695	170	210	20
PS-5015	PS-5644	180	210	20

U.S. Seal Mfg. Mini-Maze - The One Piece, All Metal, Labyrinth Seal that...

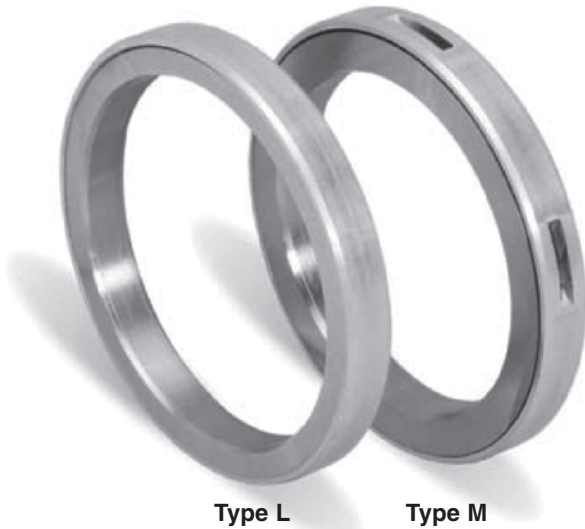

Type L

Type M

- ◆ Presses into position in seconds
- ◆ Seals in grease or other lubricants
- ◆ Stops dust, sand and metal chips from entering bearing cavities
- ◆ Has almost unlimited life - no wear as in lip or face-type seals

Product Description

- ◆ Type L is a package type labyrinth seal consisting of two precision rings, an aluminum outer ring and a steel inner ring, that are permanently mated.
- ◆ The Type M is for applications where higher pressure must be sealed or where labyrinth leakage must be minimal.

Specifications

- ◆ Temperature -350°F to +600°F
- ◆ Pressure - Splash or very tight pressures (to 1 PSI) under dynamic head conditions.
- ◆ Speed - to 30,000 fpm.